



# Tomahawk Live Trap<sup>llc</sup>

[www.livetraps.com](http://www.livetraps.com)


Manufacturing live traps and cages since 1925

800-272-8727

PO Box 155 Hazelhurst, WI 54531

715-356-4600

## Dual Release Catch Pole AVAILABLE IN 3, 4 AND 5 FT LENGTHS

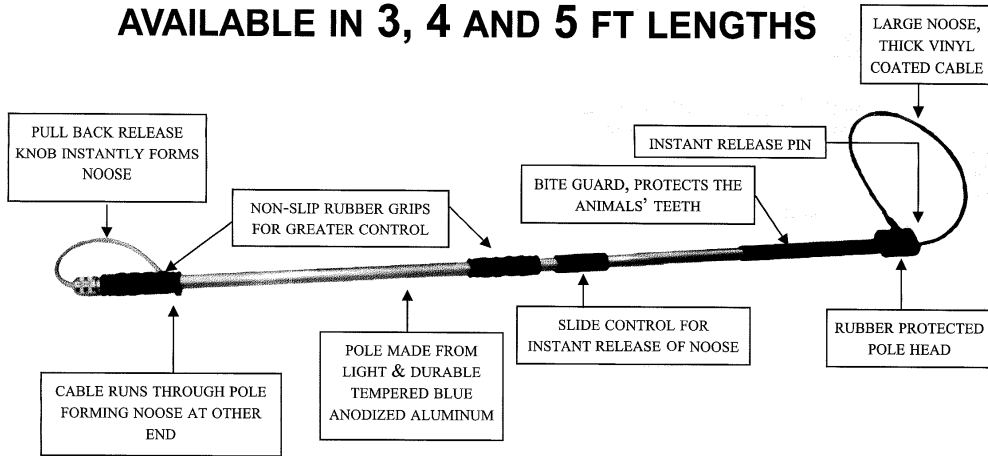

### REPLACING WORN NOOSE CABLE

- Release the noose by pulling at the instant release.
- Remove the protective rubber from the pole head.
- Locate the pole head locking hex screw. Unscrew it 3-4 rounds with a M2 size hex wrench.
 

**WARNING!**  
 Locking hex screw must be loose before pole head disassembly or threads on the pole may be damaged.
- Unscrew the instant release cable hex screw with a M2.5 size hex wrench. Extract the cable from end of the hex screw.
- Pull out instant release cable by the copper end-nut, about 1 1/2 to 2 inch for enough clearance to disassemble the pole head.
- Disassemble the pole head by unscrewing it from the pole.
- Pull back the release knob and continue to release the cable at the pole end until you see the cable-joint nut.
- Unscrew the cable-joint nut.
- Unscrew the Phillips head screw, and pull out the cable from the noose end.
- Insert the replacement cable from the noose end through the pole head. Once inserted, mount the Phillips head screw on the cable end, and tighten it.
- Tighten the cable-joint nut onto the replacement cable.
- Re-insert the quick release cable until it is visible at the head of pole.
- Wedge the quick release cable at the groove. The groove is located at the head of pole.
- Pull back the cable from the pole end until it is possible to reassemble the pole head.
- Tighten the pole head and then reverse about 1/8 of turn. Insert the instant release cable into the pole head and pull through the other end as much as possible. Continue the cable pulling and tighten the pole head.
- Insert the quick release cable through the end of hex screw. Pull the cable tight and then tighten the hex screw with a M2.5 size hex wrench. Tug the end of cable into the pole head cavity.
- Tighten the pole head locking hex screw with a M2 size hex wrench. Replace the protective rubber onto the pole head.
 

**Tighten hex screw to secure the pole head.**

### REPLACING WORN BITE GUARD

Follow steps (1) to (8). Remove the bite guard and slide the new bite guard onto the pole. Follow steps (12) to (17) to reassemble the snare pole.