Pro-Pest[®] 505 Spray Gun


Working Pressure: 800 P. S. I. Flow Rate: 3 - 8 gpm



JD9 / 505 Spray	Gun Accessories
009-JD9-ADP-L	JD9 Adaptor
009A-JD9-SO-1	JD9 Adaptor with SO-1C
009A-SO-1C	Brass Termite Treating Tip 1/8" FPT x 4"
009A-SO-2C	Brass Treating Tip with 1/4" Plug

Pro-Pest® 505 (800 PSI) Spray Gun Parts List

No.	Parts Name	Qty	Raw Material
1	Housing	1 pc	Aluminum
2	O Ring	1 pc	Rubber
3	Gasket	1 pc	Rubber
4	Valve Shaft	1 pc	Stainless Steel
5	Spring	1 pc	Stainless Steel
- 6	O Ring	1 pc	Rubber
7	Whirler	1 pc	Brass
8 -	Adjuster Body	1 pc	Brass
9	Teflon Seat	1 pc	Teflon
10	Nozzle Barrel	1 pc	Brass
11	Nozzle Nut	1 pc	Brass
12	Nozzle	1 pc	Brass
13	O Ring Nozzle	1 pc	Rubber
14	Fixed Ring	1 pc	Steel
15	Gasket	1 pc	Rubber
16	Coupling 3/4" GH	1 pc	Brass
17	Gasket GH	1 pc	Rubber
18	Trigger Lever & Bracket	1 pc	Steel
19	Clamp Washer	1 pc	Stainless Steel
20	Trigger Fixed Bolt	1 pc	Stainless Steel
21	Nut	1 pc	Stainless Steel
22	Nut	1 pc	Stainless Steel
23	Plug Nut - Gland	1 pc	Brass
	#2 Nozzle 2mm - 2-5 GPM		
	#4 Nozzle 2.5mm - 3-8 GPM		
	#6 Nozzle 4mm - 10-19 GPM		

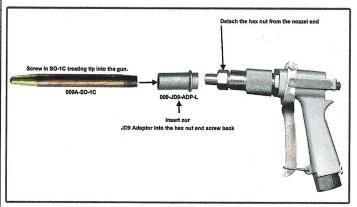

With the JD9 Adaptor, the PMP can convert the Pro-Pest®505 Spray Gun or JD9 gun into a termite treating tool. It's as easy as 1,2,3! Simply detach the hex nut from the nozzle end, insert our adaptor into the hex nut and screw back into the gun. Screw in the treating tip (SO-1C) and it's ready to go!



Page 1 of 2 / August 2014
I:/ProductInformation/Spray Guns/505 Flyer_No\$